


Specifications

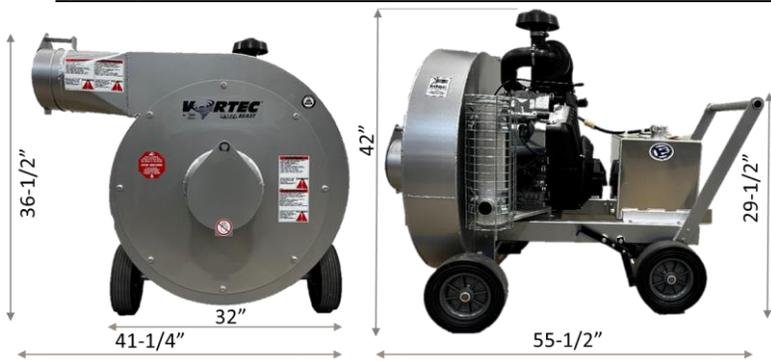

- Body: Powder-coated steel with 10" run-flat wheels.
- Weight: 474 lbs.
- Inlet: 8" standard. 6" optional.
- Outlet: 8".
- Motor: Electric start Vanguard 35hp V-Twin.
- Oil Alert system shuts motor when oil is low to prevent engine damage.
- Fuel: 8 gallon gas tank.
- Impeller: 25" diameter ¼" thick abrasive resistant steel.
- Shroud – ¼" thick abrasive resistant in main wear area.
- Warranty: 1 year ltd; Vanguard provides 3 year engine.

Not for sale in CA

Specifications subject to change; contact Intec for current specifications

Features

- 35hp V-Twin electric start w/ 3 year Vanguard warranty
- ✓ Oversized shaft
- ✓ Commercial grade air filter
- ✓ Cooling inlet air filter to reduce maintenance



- Abrasive resistant steel construction to increase value:
 - ✓ shroud in wear areas
 - ✓ impeller

- Intec exclusive 'anti-tip' frame




Accessories – can be used with all vacuums



Enhance Safety & Extend the Vacuum's Life

- ✓ Safety enhanced by limiting foreign objects from exiting vacuum at high speeds.
- ✓ Vacuum's Life extended by preventing foreign materials from entering the vacuum & potentially causing damage to the impeller, shroud, and engine.

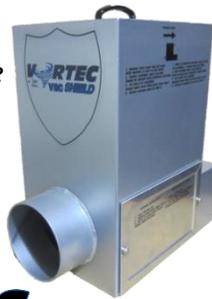

Eliminate Bag Change Down Time



2 Individuals with One Vacuum



Simplify pickup

- ✓ 4" and 6" diameters, 4' and 2' lengths.
- ✓ Swivel hose connector simplifies movement.



Distributed by



Manufactured by

Insulation Technology Corporation, d.b.a. Intec
9251 Bruin Boulevard
Frederick, CO 80504



phone: 303-833-6644
sales@inteccorp.com

www.inteccorp.com



... it's the 'tec' inside that counts!